


# Inductive sensor

## Bi3-Q06-AN6X2


**TURCK**

Industrial  
Automation

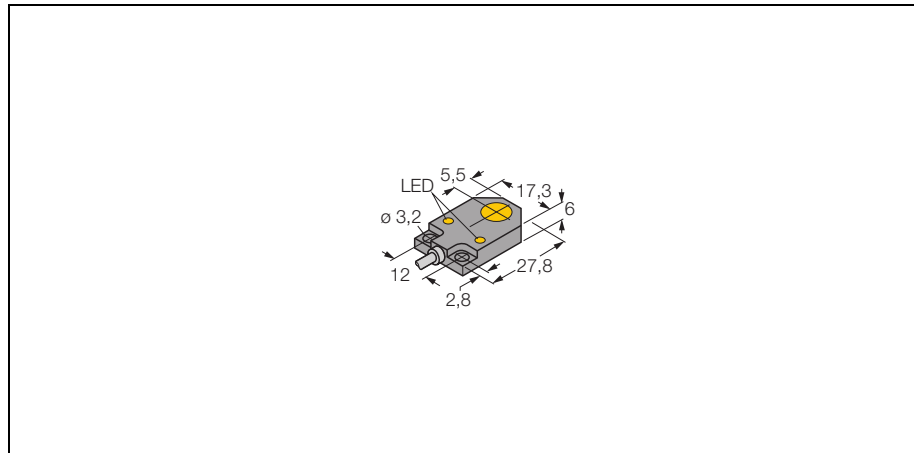

- rectangular, height 6mm
- top active face
- plastic, PA12-GF30
- 3-wire DC, 10...30 VDC
- normally open npn output
- cable connection

### Wiring diagram



### Functional principle

Inductive sensors are designed for wear-free and non-contact detection of metal objects. For this purpose they use a high-frequency electro-magnetic AC field that interacts with the target. Concerning inductive sensors, this field is generated by an LC resonant circuit with a ferrite core coil.

<b>Type</b>	Bi3-Q06-AN6X2
Ident-No.	1620150
<b>Rated operating distance Sn</b>	3 mm
Mounting condition	flush
Assured sensing range	(0,81 x Sn) mm
Correction factors	St37 = 1, V2A ~ 0.7, Ms ~ 0.4, Al ~ 0.3
Repeatability	2 %
Temperature drift	± 10 %
Hysteresis	3... 15 %
Ambient temperature	-25...+ 70 °C
<b>Operating voltage</b>	10... 30VDC
Residual ripple	10 % U <sub>SS</sub>
DC rated operational current	200 mA
No-load current I <sub>0</sub>	15 mA
Residual current	0.1 mA
Rated insulation voltage	0.5 kV
Short-circuit protection	yes / cyclic
Voltage drop at I <sub>e</sub>	1.8V
Wire breakage / Reverse polarity protection	yes / complete
Output function	3-wire, normally open, npn
Switching frequency	1 kHz
<b>Housing</b>	rectangular, Q06
Dimensions	27.8 x 17.3 x 6 mm
Housing material	plastic, PBT-GF30-V0
Material active face	plastic, PA12-GF30
Connection	cable
Cable quality	Ø 4, LifYY-11Y, PUR, 2 m
Cable cross section:	3 x 0.25mm <sup>2</sup>
Vibration resistance	55 Hz (1 mm)
Shock resistance	30g (11 ms)
Degree of protection	IP67
<b>Operating voltage display</b>	LED green
Display switch state	LED yellow

**Inductive sensor  
Bi3-Q06-AN6X2**

Mounting instructions	minimum distances
Distance D	2 x B
Distance W	3 x Sn
Distance S	1 x B
Distance G	6 x Sn

---

**Width of the active face B**                      5.5 mm

