



Quadraform 40 x 40  
Sn = 30 mm  
DC 2-Wire  
shielded

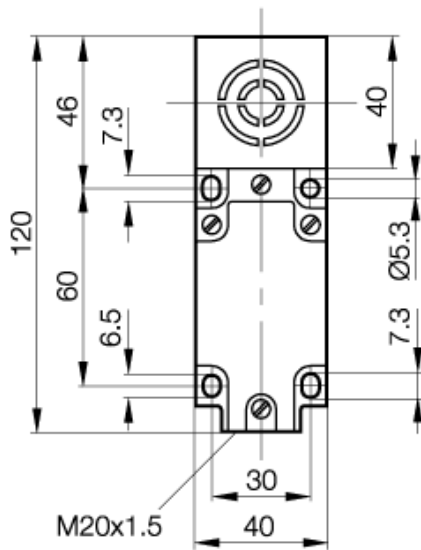

PX1551



If not differently indicated,  
all values by IEC 60947-5-2 (DIN EN60947-5-2)  
Specifications subject to change

Balluff GmbH  
Postfach 1160  
73761 Neuhausen  
Telefon (07158) 173-0  
Telefax (07158) 5010

### Common Data

Mounting		shielded
Rated operating distance Sn	mm	30,0
Assured operating distance Sa	mm	0...24
Repeatability	%	<= 5
Hysteresis	%	<= 10
Ambient temperature range	°C	-25...+70
Resolution Degree		3
IEC-Code		I1C40SD3N
Time delay before availability	ms	<= 10

### Mechanical Data

Housing size	mm	Quadraform 40 x 40
Measurements BxHxT or DxT	mm	40 x 40 x 120
Housing material		PBTP
Material of sensing face		PBTP
Degree of protection		IP67
Connection		Screw terminals

### Electrical Data

Current type		DC
Wiring		2-Wire
switching function		normally-closed
Output signal		NAMUR
Rated operational voltage	V	8.2 DC
Rated supply frequency	Hz	DC
Rated supply frequency	Hz	80

21.01.2004 / Online-Information