


Inductive sensor Ni3-EG08-AP6X


TURCK

Industrial
Automation



- threaded barrel, M8 x 1
- stainless steel, 1.4404
- 3-wire DC, 10...30 VDC
- normally open, pnp output
- cable connection

Wiring diagram



Functional principle


Inductive sensors are designed for wear-free and non-contact detection of metal objects. For this purpose they use a high-frequency electro-magnetic AC field that interacts with the target. Concerning inductive sensors, this field is generated by an LC resonant circuit with a ferrite core coil.

Type	Ni3-EG08-AP6X
Ident-No.	4602740
Rated operating distance Sn	3 mm
Mounting condition	non-flush
Assured sensing range	(0,81 x Sn) mm
Correction factors	St37 = 1, V2A ~ 0.7, Ms ~ 0.4, Al ~ 0.3
Repeatability	2 %
Temperature drift	± 10 %
Hysteresis	3... 15 %
Ambient temperature	-25...+ 70 °C
Operating voltage	10... 30VDC
Residual ripple	10 % U _{SS}
DC rated operational current	150 mA
No-load current I ₀	15 mA
Residual current	0.1 mA
Rated insulation voltage	0.5 kV
Short-circuit protection	yes / cyclic
Voltage drop at I _e	1.8V
Wire breakage / Reverse polarity protection	yes / complete
Output function	3-wire, normally open, pnp
Switching frequency	3 kHz
Housing	threaded barrel, M8 x 1
Dimensions	41.6 mm
Housing material	metal, AISI 316L
Material active face	plastic, plastic, PA12-GF20
End cap	plastic, PP
Tightening torque of housing nut	10 Nm
Connection	cable
Cable quality	Ø 4, LiFY-11Y, PUR, 2 m
Cable cross section:	3 x 0.25mm ²
Vibration resistance	55 Hz (1 mm)
Shock resistance	30g (11 ms)
Degree of protection	IP67

**Inductive sensor
Ni3-EG08-AP6X**

Mounting instructions	minimum distances
Distance D	3 x B
Distance W	3 x Sn
Distance T	3 x B
Distance S	1,5 x B
Distance G	6 x Sn
Distance N	2 x Sn

Diameter of the active area B Ø 8 mm



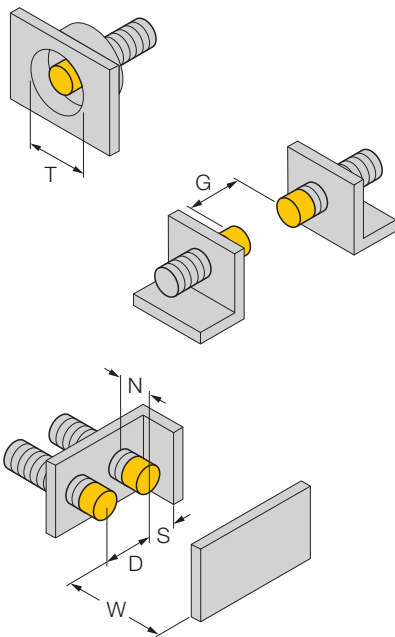


Inductive sensor Ni3-EG08-AP6X

TURCK

Industrial
Automation

Accessories

Type code	Ident-No.	Short text	Dimension drawing
BST-08B	6947210	fixing clamp with dead-stop; material: PA6	 <p>Technical drawing of a rectangular fixing clamp. Dimensions: 12 mm height, 20 mm length, 16 mm width. A hole with diameter 8 mm is on the front face. A hole with diameter 7.4 mm is on the top face. An M3 screw hole is on the top face. A 4 mm wide slot is on the right side.</p>
MW-08	6945008	mounting bracket; material: stainless steel A2 1.4301 (AISI 304)	 <p>Technical drawing of a U-shaped mounting bracket. Dimensions: 5.7 mm height, 7.5 mm width, 1.8 mm thickness. A 1.9 mm wide slot is on the bottom. A 1.9 mm wide slot is on the right side. A 1.9 mm wide slot is on the left side. A 1.9 mm wide slot is on the right side.</p>
BSS-08	6901322	fixing clamp; material: polypropylene	 <p>Technical drawing of a cylindrical fixing clamp. Dimensions: 12 mm height, 20 mm diameter. A hole with diameter 8 mm is on the front face. A hole with diameter 7.4 mm is on the top face. An M3 screw hole is on the top face. A 4 mm wide slot is on the right side.</p>