

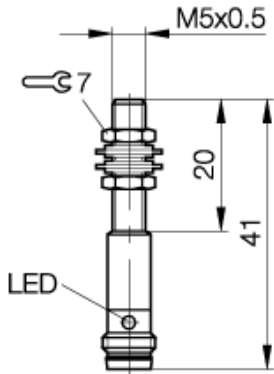


cyl. M 5
Sn = 1,5 mm
DC 3-Wire
shielded
sn: 2fach



PX0708a




Utilization categories DC 13

Further information:

■ Einbauhinweise 825357 ■ Hinweis EMV Schutzbeschaltung

■ Tightening torque:



Torque 1 Nm 1

If only torque1 is indicated, this applies to entire thread

If not differently indicated, all values by IEC 60947-5-2 (DIN EN60947-5-2) Specifications subject to change

Common Data

Mounting		shielded
Rated operating distance Sn	mm	1,5
Assured operating distance Sa	mm	0...1.2
Repeatability	%	<= 5
Hysteresis	%	<= 15
Function indication		yes
Ambient temperature range	°C	-25...+70
Polution Degree		3
IEC-Code		I1A05AN2
Time delay before availability	ms	<10

Mechanical Data

Housing size	mm	cyl. M 5
Measurements BxHxT or DxT	mm	M5x0.5 x 41
Housing material		stainless steel
Material of sensing face		PA 12
Degree of protection		IP67
Connection		Connector S49

Electrical Data

Current type		DC
Wiring		3-Wire
switching function		normally-open
Output signal		NPN
Rated operational voltage	V	24 DC
Rated operational current	mA	100
Supply voltage	V	10...30 DC
Ripple	%	<= 10
Rated supply frequency	Hz	3000
Minimum operational current	mA	0
No-load supply current	mA	<= 10 / <= 3
Off-state current	µA	<= 80
Voltage drop	V	<= 3.0/-
Short circuit protection		yes
Protected against polarity reversal		yes

EMV

ESD/RFI/Burst/IVW

Emission

30.08.2006 / Online-Information

