


Quadraform 8 x 8
 Sn = 2 mm
 DC 3-Wire
 shielded



PX0670

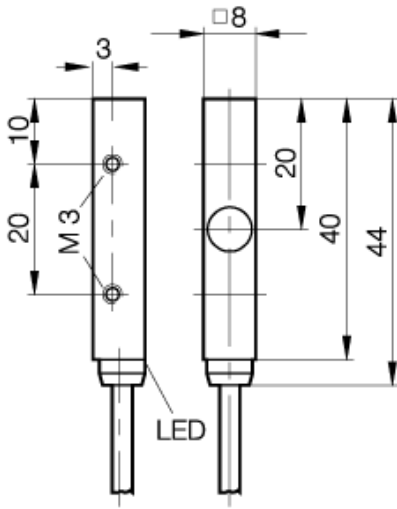

Utilization categories DC 13

If not differently indicated,
 all values by IEC 60947-5-2 (DIN EN60947-5-2)
 Specifications subject to change
 Balluff GmbH
 Postfach 1160
 73761 Neuhausen
 Telefon (07158) 173-0
 Telefax (07158) 5010

Common Data

Mounting		shielded
Rated operating distance Sn	mm	2,0
Assured operating distance Sa	mm	0...1.6
Repeatability	%	<= 5
Hysteresis	%	<= 15
Function Indication		yes
Ambient temperature range	°C	-25...+70
Polution Degree		3
IEC-Code		I1C08BN1
Time delay before availability	ms	<= 10

Mechanical Data

Housing size	mm	Quadraform 8 x 8
Measurements BxHxT or DxT	mm	8 x 8 x 40
Housing material		Gd Zn Al
Material of sensing face		PA 12
Degree of protection		IP65
Connection		Cable
Cable type		LifY-11Y-O

Electrical Data

Current type		DC
Wiring		3-Wire
switching function		normally-closed
Output signal		NPN
Rated operational voltage	V	24 DC
Rated operational current	mA	200
Supply voltage	V	10...30 DC
Ripple	%	<= 15
Rated supply frequency	Hz	1000
No-load supply current	mA	<= 12/<= 20
Off-state current	µA	<= 80
Voltage drop	V	<= 2.5/-
Short circuit protection		yes
Protected against polarity reversal		yes

EMV

ESD/RFI/Burst/IVW
 Emission

21.01.2004 / Online-Information

